



BH形


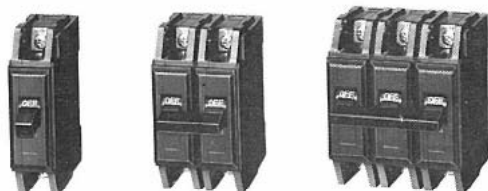


形 名			BH			BH100	
定格電流 A			10	15	20	15	20
			30	40	50	30 (40)	50
極 数			1	2	3	2	3
定格電圧 V			AC		265	220	265
			DC		125		125
定格しや断容量 kA	JIS JEM (sym)	AC	110V	5	—	—	
			110/220V	—	5	5	
			220V	2.5		2.5	
			265V	2.5	—	2.5	—
	NK (sym)	DC	125V	1	5	5	
			125V	—	7.5	5	5
			250V	—	5	2.5	2.5
			125V	—	5	2.5	2.5

温度補正曲線

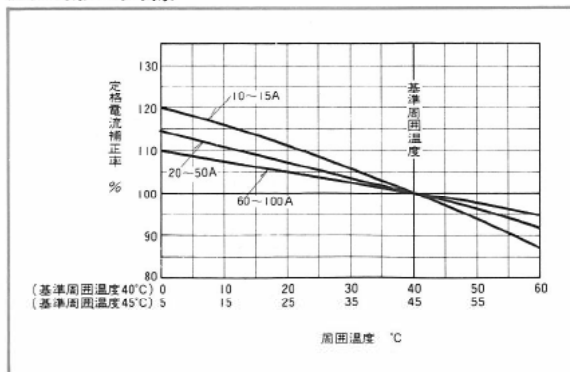


動作特性曲線

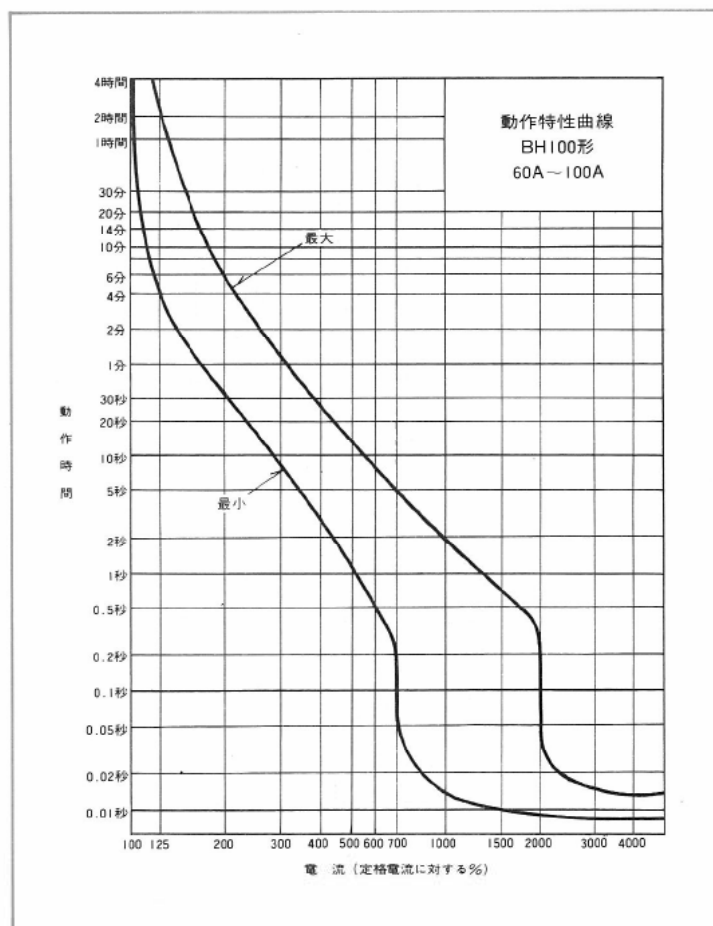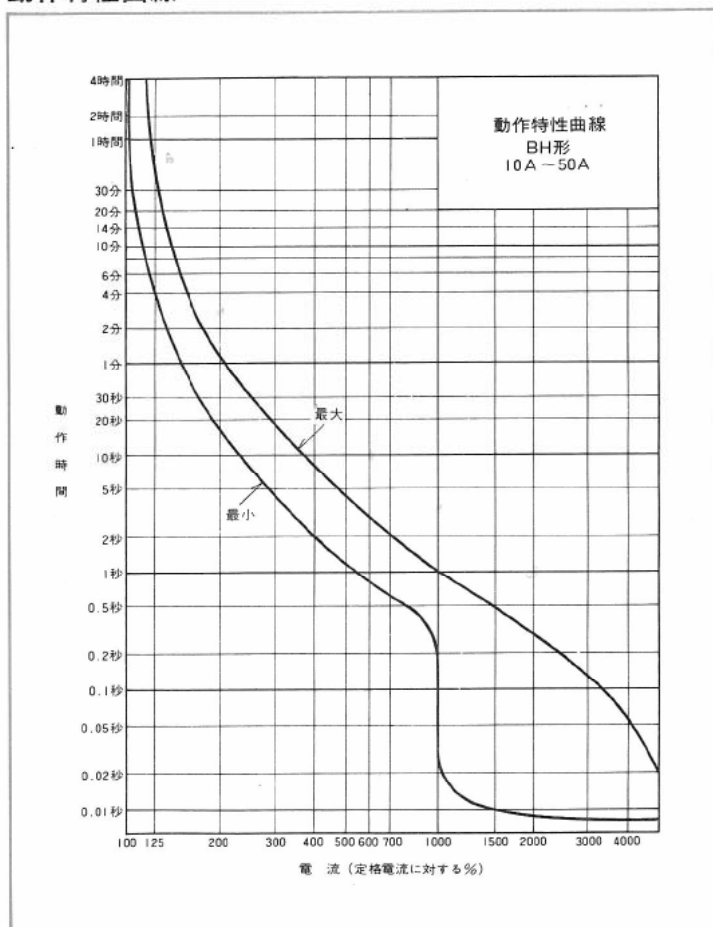

外形寸法図

BH形

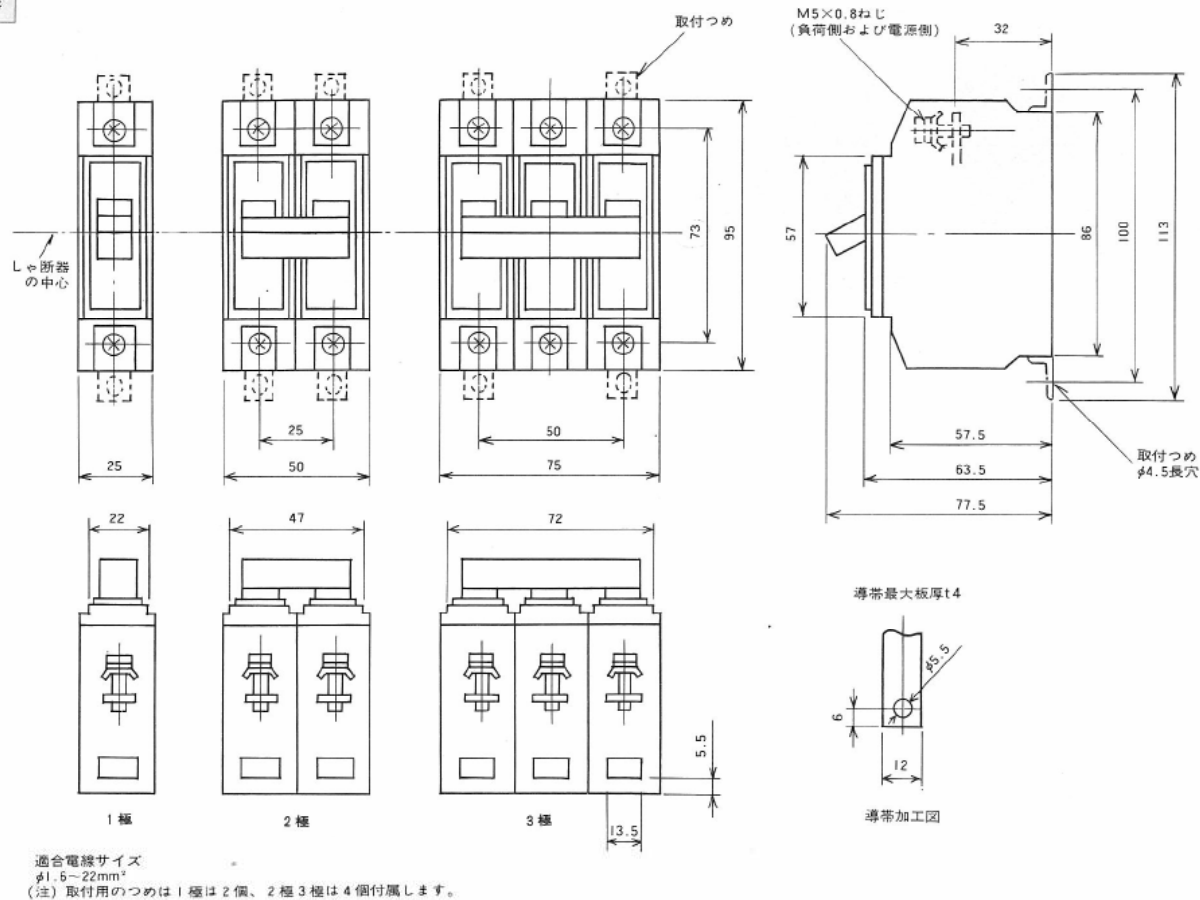

BH100形

